Intertek 5035647

Intertek 5035647

amfori
Trade with purpose

GUANGDONG MEILERN CATERING EQUIPMENT CO., LTD.



Your Trusted Commercial Kitchen Equipment Manufacturer

MYLERN®

Factory Overview












Guangdong Meilern Catering Equipment Co., Ltd., founded in 2018 and located in Changping, Dongguan of China, is an ETL listed and Amfori audited factory dedicated to design, manufacture, and sales of commercial kitchen equipment.

Our main restaurant equipment categories include gas countertop hotplates, charbroilers, griddles, gas stock pot ranges, gas combination ranges, gas convection ovens, gas deep fryers, electric food warmer carts and other heavy-duty foodservice equipment. With an area of 30,000 m2 and thanks to our continous upgrade of automation, we take pride in flexible capacity to meet diverse OEM and ODM demands from global clients.

Meilern strictly adheres to the philosophy of "quality first" , and is committed to making high-quality foodservice equipment through strict implementation of quality management system and global certification.

Bearing the vision “Build long-term partnership with global clients for growth together”, Meilern cares about whatever is your concern in our business partnership, including capacity, lead-time, quality, cost and service, etc.

We look forward to working and growing with you, and aim to be your top business partner.

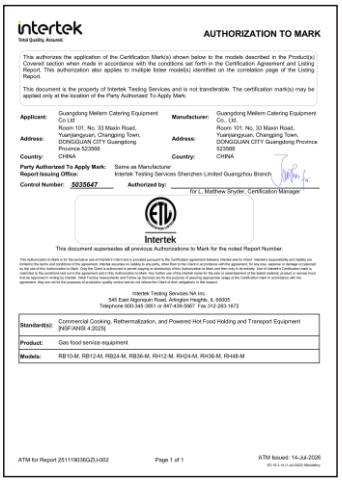
intertek
Total Quality. Assured.

AUTHORIZATION TO MARK

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

Applicant: Guangdong Meilern Catering Equipment Co Ltd
Address: Room 101, No. 33 Maxin Road, Yuanjiangyuan, Changping Town, DONGGUAN CITY Guangdong Province 523566
Country: CHINA

Manufacturer: Guangdong Meilern Catering Equipment Co., Ltd.
Address: Room 101, No. 33 Maxin Road, Yuanjiangyuan, Changping Town, DONGGUAN CITY Guangdong Province 523566
Country: CHINA

Party Authorized To Apply Mark: Same as Manufacturer
Report Issuing Office: Intertek Testing Services Shenzhen Limited Guangzhou Branch


Control Number: 5035647 Authorized by: for L. Matthew Snyder, Certification Manager

This document supersedes all previous Authorizations to Mark for the noted Report Number.

Intertek Testing Services NA Inc.
545 East Algonquin Road, Arlington Heights, IL 60005
Telephone 800-345-3851 or 847-439-9997 Fax 312-283-1672

Standard(s):	Commercial Cooking, Rethermalization, and Powered Hot Food Holding and Transport Equipment [NSF/ANSI 4 2020]
Product:	Gas food service equipment
Models:	RB10-M, RB12-M, RB24-M, RB36-M, RH12-M, RH24-M, RH36-M, RH48-M

ATM for Report 251119036GZU-002 Page 1 of 1 ATM Issued: 14-Jul-2026

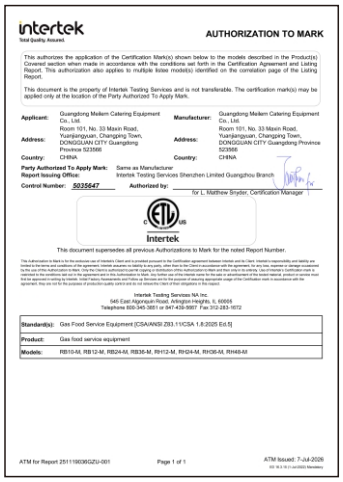
intertek
Total Quality. Assured.

AUTHORIZATION TO MARK

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

Applicant: Guangdong Meilern Catering Equipment Co., Ltd.
Address: Room 101, No. 33 Maxin Road, Yuanjiangyuan, Changping Town, DONGGUAN CITY Guangdong Province 523566
Country: CHINA

Manufacturer: Guangdong Meilern Catering Equipment Co., Ltd.
Address: Room 101, No. 33 Maxin Road, Yuanjiangyuan, Changping Town, DONGGUAN CITY Guangdong Province 523566
Country: CHINA

Party Authorized To Apply Mark: Same as Manufacturer
Report Issuing Office: Intertek Testing Services Shenzhen Limited Guangzhou Branch

Control Number: 5035647 Authorized by: for L. Matthew Snyder, Certification Manager

This document supersedes all previous Authorizations to Mark for the noted Report Number.

Intertek Testing Services NA Inc.
545 East Algonquin Road, Arlington Heights, IL 60005
Telephone 800-345-3851 or 847-439-9997 Fax 312-283-1672

Standard(s):	Gas Food Service Equipment [CSA/ANSI Z83.11/CSA 1.8:2025 Ed.5]
Product:	Gas food service equipment
Models:	RB10-M, RB12-M, RB24-M, RB36-M, RH12-M, RH24-M, RH36-M, RH48-M

ATM for Report 251119036GZU-001 Page 1 of 1 ATM Issued: 7-Jul-2026


HTT
TECHNOLOGY

Certificate of Conformity

Certificate No. : HTT2302302GL
Applicant : Dongguan Aikadi Industrial Technology Co., Ltd
Applicant Address : No. 6, Shuxia Road, Yuanjiangyuan Xinnan Village, Changping Town, Dongguan
Manufacturer : Dongguan Aikadi Industrial Technology Co., Ltd
Manufacturer Address : No. 6, Shuxia Road, Yuanjiangyuan Xinnan Village, Changping Town, Dongguan
Product : Food warmer cart
Model No. : AKD-11-21, AKD-6-21, AKD-6-21B, AKD-6-21D, AKD-6-21BD, AKD-11-21B, AKD-11-21D, AKD-11-21BD, AKD-11-22, AKD-11-22B, AKD-11-22D, AKD-11-22BD
Trademark : N/A

The certificate of conformity is based on an evaluation of a sample of the above-mentioned product. Technical report and documentation are at the applicant's disposal. This is to certify that the tested sample is in conformity with all requirements of EU Machinery Directive 2006/42/EC, the certificate does not imply assessment of the production and does not permit the use of Lab's logo. The applicant of the certificate is authorized to use this certificate in connection with EC declaration of conformity to the Directive.


Test standards	Report(s) Number	Issued By	Issued Date
EN ISO 12100:2010	HTT2302302GLR	HTT	Feb.28.2023
EN 60204-1:2018			

This certificate of conformity is not transferable and based on an evaluation of a sample of the above-mentioned product.

Authorized Signatory: Kevin Yang (Senior Manager)
Date: Feb.28.2023

CE

Shenzhen HTT Technology Co., Ltd. Web: www.httprc.com
TEL: 0755-23595200 FAX: 0755-23595201 Hotline: 400-6655-311 Mail: info@httprc.com
1F, B Building, Huafeng International Robotics Industrial Park, Guihu, Xixiang Street, Bao'an District, Shenzhen, China

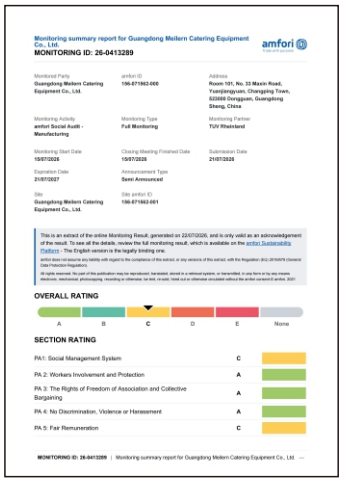
Monitoring summary report for Guangdong Meilern Catering Equipment Co., Ltd.
MONITORING ID: 26-0413289

amfori

Monitored Party: Guangdong Meilern Catering Equipment Co., Ltd.
amfori ID: 196-871962-000
Address: Room 101, No. 33 Maxin Road, Yuanjiangyuan, Changping Town, 523566 Dongguan, Guangdong Sheng, China
Monitoring Activity: amfori Social Audit - Manufacturing
Monitoring Type: Full Monitoring
Monitoring Partner: TUV Rheinland
Monitoring Start Date: 15/07/2026
Closing Meeting Finished Date: 15/07/2026
Submission Date: 21/07/2026
Expiration Date: 21/07/2027
Announcement Type: Semi Announced
Site: Guangdong Meilern Catering Equipment Co., Ltd.
Site amfori ID: 196-871962-001

This is an extract of the online Monitoring Result, generated on 22/07/2026, and is only valid as an acknowledgement of the result. To see all the details, review the full monitoring result, which is available on the amfori Sustainability Platform - The English version is the legally binding one.

amfori does not assume any liability with regard to the compliance of this extract, or any versions of the extract, with the Regulation (EU) 2016/679 (General Data Protection Regulation).

All rights reserved. No part of this publication may be reproduced, translated, stored in a retrieval system, or transmitted, in any form or by any means electronic, mechanical, photocopying, recording or otherwise, be lent, re-sold, hired out or otherwise circulated without the amfori consent © amfori, 2021

OVERALL RATING

A B C D E None

SECTION RATING

PA1: Social Management System	C
PA 2: Workers Involvement and Protection	A
PA 3: The Rights of Freedom of Association and Collective Bargaining	A
PA 4: No Discrimination, Violence or Harassment	A
PA 5: Fair Remuneration	C

MONITORING ID: 26-0413289 | Monitoring summary report for Guangdong Meilern Catering Equipment Co., Ltd



Product Category

Gas Hotplate 1

Gas Stock Pot Range 2

Gas Charbroiler 3-4

Gas Griddle 5-6

Gas Combination Range 7-9

Gas Deep Fryer 10

Gas Convection Oven 11-12

Electric Food Warmer Cart 13-18

Gas Hotplate

RB12-M
12” Gas Hotplate



Exterior Material:
Stainless Steel front and sides,
aluminized steel back;
Dimensions(WxDxH): 304*728*330 mm;
Gas Type:NG/LPG;
Burner: 2PCs octagon cast iron burners;
Heat Output: 50,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

RB24-M
24” Gas Hotplate



Exterior Material: Stainless Steel
front and sides, aluminized steel back;
Dimensions(WxDxH): 609*728*330 mm;
Gas Type:NG/LPG;
Bumer: 4PCs octagon cast iron
burners;
Heat Output: 100,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

RB36-M
36” Gas Hotplate



Exterior Material: Stainless Steel front
and sides, aluminized steel back;
Dimensions(WxDxH): 914*728*330 mm;
Gas Type:NG/LPG;
Burner: 6PCs octagon cast iron burners;
Heat Output: 150,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

Gas Stock Pot Range

RB10-M
Gas 1-burner Stock Pot Range



Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 462*630*570 mm;
Gas Type: NG/LPG;
Burner: 2PCs round cast iron burners;
Heat Output: 80,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

RB102-M
Gas 2-burner Stock Pot Range



Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 910*630*570 mm;
Gas Type: NG/LPG;
Burner: 4PCs round cast iron burners;
Heat Output: 160,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

RB103-M
Gas 3-burner Stock Pot Range



Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 1365*630*570 mm;
Gas Type: NG/LPG;
Burner: 6PCs round cast iron burners;
Heat Output: 240,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

Gas Charbroiler

RH12-M
12" Gas Charbroiler



Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 304*728*394 mm;
Gas Type:NG/LPG;
Cooktop Size: 300*520 mm;
Grill: 20mm thick anti-rust cast iron;
Burner:
1PC U-shaped Stainless Steel burners;
Heat Output: 35,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

RH24-M
24” Gas Charbroiler



Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 609*728*394 mm;
Gas Type: NG/LPG;
Cooktop Size: 600*520 mm;
Grill: 20mm thick anti-rust cast iron;
Burner:
2PCs U-shaped Stainless Steel burners;
Heat Output: 70,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection


RH36-M
36” Gas Charbroiler



Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 914*728*394 mm;
Gas Type: NG/LPG;
Cooktop Size: 900*520 mm;
Grill: 20mm thick anti-rust cast iron;
Burner:
3PCs U-shaped Stainless Steel burners;
Heat Output: 105,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection


Gas Charbroiler

RH48-M
48" Gas Charbroiler

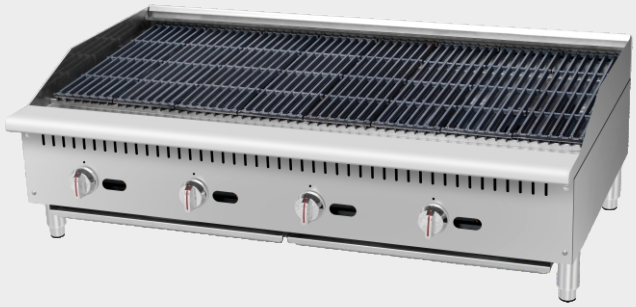

Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 1220*728*394 mm;
Gas Type: NG/LPG;
Cooktop Size: 1200*520 mm;
Grill: 20mm thick anti-rust cast iron;
Burner:
4PCs U-shaped Stainless Steel burners;
Heat Output: 140,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection


RH60-M
60" Gas Charbroiler

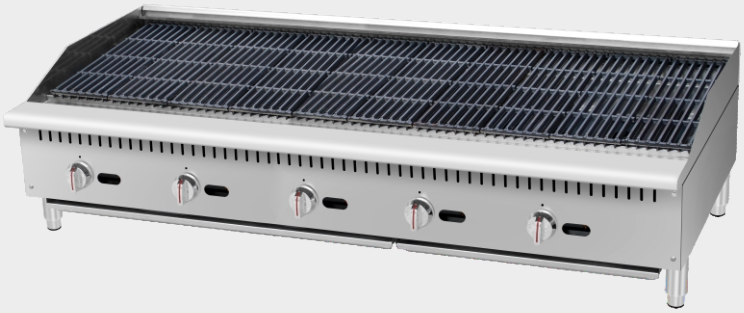

Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 1530*728*394 mm;
Gas Type: NG/LPG;
Cooktop Size: 1500*520 mm;
Grill: 20mm thick anti-rust cast iron;
Burner:
5PCs U-shaped Stainless Steel burners;
Heat Output: 175,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection


Gas Griddle

RG12-M
12" Gas Griddle

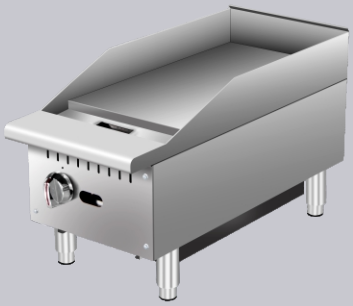


Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 304*728*394 mm;
Gas Type:NG/LPG;
Cooktop Size: 300*525 mm;
Cooking Plate Thickness: 20mm;
Burner:
1PC U-shaped Stainless Steel burner;
Heat Output: 30,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

RG24-M
24" Gas Griddle

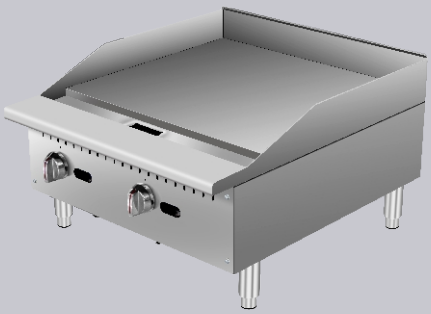

Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 609*728*394 mm;
Gas Type: NG/LPG;
Cooktop Size: 605*525 mm;
Cooking Plate Thickness: 20mm;
Burner:
2PCs U-shaped Stainless Steel burners;
Heat Output: 60,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

RG36-M
36" Gas Griddle

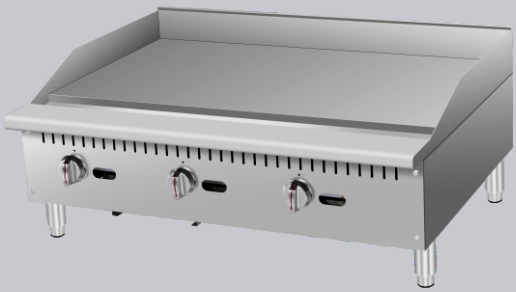

Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 914*728*394 mm;
Gas Type: NG/LPG;
Cooktop Size: 910*525 mm;
Cooking Plate Thickness: 20mm;
Burner:
3PCs U-shaped Stainless Steel burners;
Heat Output: 90,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

Gas Griddle

RG48-M
48" Gas Griddle



Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 1220*728*394 mm;
Gas Type: NG/LPG;
Cooktop Size: 1216*525 mm;
Cooking Plate Thickness: 20mm;
Burner:
4PCs U-shaped Stainless Steel burners;
Heat Output: 120,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

RG60-M
60" Gas Griddle



Exterior Material: Stainless Steel front and sides, aluminized steel back;
Dimensions(WxDxH): 1530*728*394 mm;
Gas Type: NG/LPG;
Cooktop Size: 1508*525 mm;
Cooking Plate Thickness: 20mm;
Burner:
5PCs U-shaped Stainless Steel burners;
Heat Output: 150,000 BTU/h;
Flame-out Protection: not included;
3/4” rear gas connection

Gas Combination Range

RB24-S

24" Gas Combination Range(24" hotplate +1 oven)



Exterior Material: Stainless Steel front, aluminized steel sides and back;
Interior Oven Chamber: Porcelain Enameled;
Product Dimensions(WxDxH): 610*800*1520 mm;
Oven Chamber Dimensions(WxDxH): 500*570*360 mm;
Gas Type: NG/LPG;
Burner: 4PCs octagon cast iron burners + 1PC Stainless Steel pipe burner;
Heat Output(NG): 153,000 BTU/h;
Heat Output(LPG): 136,000 BTU/h;
Temperature Range: 100°C ~ 300°C (212°F~550°F);
Flame-out Protection: gas oven with flame-out protection;
3/4” rear gas connection

RB36-S

36" Gas Combination Range(36" hotplate + 1 oven)



Exterior Material: Stainless Steel front, aluminized steel sides and back;
Interior Oven Chamber: Porcelain Enameled;
Product Dimensions(WxDxH): 910*800*1520 mm;
Oven Chamber Dimensions(WxDxH): 660*570*360 mm;
Gas Type: NG/LPG;
Burner: 6PCs octagon cast iron burners + 1PC Stainless Steel pipe burner;
Heat Output(NG): 213,000 BTU/h;
Heat Output(LPG): 190,000 BTU/h;
Temperature Range: 100°C ~ 300°C (212°F~550°F);
Flame-out Protection: gas oven with flame-out protection;
3/4” rear gas connection

Gas Combination Range

RB50-S

60" Gas Combination Range
(60" hotplate + 2 Ovens)



Exterior Material: Stainless Steel front, aluminized steel sides and back;
Interior Oven Chamber: Porcelain Enameled;
Product Dimensions(WxDxH):
1530*800*1520 mm;
Oven Chamber Dimensions(WxDxH):
660*570*360 mm x2;
Gas Type: NG/LPG;
Burner: 10PCs octagon cast iron burners + 2PCs Stainless Steel pipe burners;
Heat Output(NG): 366,000 BTU/h;
Heat Output(LPG): 32
6,000 BTU/h;
Temperature Range:
100°C ~ 300°C (212°F~550°F);
Flame-out Protection:
gas oven with flame-out protection;
3/4” rear gas connection

RB12-RG24-S

36" Gas Combination Range
(12" hotplate +24" Griddle +1 Oven)



Exterior Material: Stainless Steel front, aluminized steel sides and back;
Interior Oven Chamber: Porcelain Enameled;;
Product Dimensions(WxDxH):
910*800*1520 mm;
Oven Chamber Dimensions(WxDxH):
660*570*360 mm
Gas Type: NG/LPG;
Burner: 2PCs octagon cast iron burners + 2PCs U-shaped Stainless Steel burners + 1PC Stainless Steel pipe burner;
Heat Output(NG): 153,000BTU/h;
Heat Output(LPG): 136,000BTU/h;
Temperature Range:
100°C ~ 300°C (212°F~550°F);
Flame-out Protection:
gas oven with flame-out protection;
3/4” rear gas connection

Gas Combination Range

RB36-RG24-S

60" Gas Combination Range(36" hotplate + 24" Griddle +2 Ovens)



Exterior Material: Stainless Steel front, aluminized steel sides and back;
Interior Oven Chamber: Porcelain Enameled;
Product Dimensions(WxDxH): 1530*800*1520 mm;
Oven Chamber Dimensions(WxDxH): 660*570*360 mm x2;
Gas Type: NG/LPG;
Burner: 6PCs octagon cast iron burners + 2PCs U-shaped Stainless Steel burners + 2PCs Stainless Steel pipe burners;
Heat Output(NG): 306,000 BTU/h;
Heat Output(LPG): 272,000 BTU/h;
Temperature Range: 100°C ~ 300°C (212°F~550°F);
Flame-out Protection: gas oven with flame-out protection;
3/4” rear gas connection

RG36-S

36" Gas Combination Range(36" griddle +1 oven)



Exterior Material: Stainless Steel front, aluminized steel sides and back;
Interior Oven Chamber: Porcelain Enameled;
Product Dimensions(WxDxH): 910*800*1520 mm;
Oven Chamber Dimensions(WxDxH): 660*570*360 mm;
Gas Type: NG/LPG;
Burner: 3PCs U-shaped Stainless Steel burners + 1PC Stainless Steel pipe burner;
Heat Output(NG): 123,000 BTU/h;
Heat Output(LPG): 109,000 BTU/h;
Temperature Range: 100°C ~ 300°C (212°F~550°F);
Flame-out Protection: gas oven with flame-out protection;
3/4” rear gas connection

Gas Deep Fryer

F3-NG/F3-LP
3-Tube Gas Deep Fryer



Exterior Material: Stainless Steel front,
aluminized steel sides and back;
Oil Tank Material:
Stainless Steel 439, fully sand-blasted;
Dimensions(WxDxH): 395*770*1150 mm;
Basket Dimensions(LxWxH): 335*165*150 mm x2;
Gas Type: NG/LPG;
Burner: 3 PCs tube burners;
Oil Capacity: 17-20L(35-40lbs);
Heat Output: 90,000 BTU/h;
Temperature Range: 93°C ~ 205°C (200°F~400°F);
Flame-out Protection: included;
3/4” rear gas connection

F4-NG/F4-LP
4-Tube Gas Deep Fryer



Exterior Material: Stainless Steel front,
aluminized steel sides and back;
Oil Tank Material:
Stainless Steel 439, fully sand-blasted;
Dimensions(WxDxH): 395*770*1150 mm;
Basket Dimensions(LxWxH): 335*165*150 mm x2;
Gas Type: NG/LPG;
Burner: 4 PCs tube burners;
Oil Capacity: 20-23L(40-50lbs);
Heat Output: 120,000 BTU/h;
Temperature Range: 93°C ~ 205°C (200°F~400°F);
Flame-out Protection: included;
3/4” rear gas connection

F5-NG/F5-LP
5-Tube Gas Deep Fryer



Exterior Material: Stainless Steel front,
aluminized steel sides and back;
Oil Tank Material:
Stainless Steel 439, fully sand-blasted;
Dimensions(WxDxH) 535*873*1150 mm;
Basket Dimensions(LxWxH) 445*235*150 mm x2;
Gas Type: NG/LPG;
Burner: 5PCs tube burners;
Oil Capacity: 36-42L(75-80lbs);
Heat Output: 150,000 BTU/h;
Temperature Range: 93°C ~ 205°C (200°F~400°F);
Flame-out Protection: included;
3/4” rear gas connection

Gas Convection Oven(mechanical control)

RGC-100

Mechanical Control Single-Deck Double-Door Gas Convection Oven





Exterior Material: Stainless Steel front and sides, aluminized steel back;
Interior Oven Chamber: Porcelain Enameled;
Product Dimensions(WxDxH): 965*1130*1570 mm;
Oven Chamber Dimensions(WxDxH): 740*570*500 mm;
Grid Size(WxD): 710*530 mm (5PCs);
Gas Type: NG/LPG;
Burner: 3PCs cast iron burners;
Heat Output: 54,000 BTU/h;
Ignition mode: pulse ignition;
With forced “cool down” mode;
Electronic thermostat(FAST) & manual timer control;
Temperature Range: +66°C ~ +260°C (150°F~500°F);
Motor Voltage: 120V/60Hz (or customized);
3/4” rear gas connection

RGC-100*2

Mechanical Control Single-Deck Double-Door Gas Convection Oven



Exterior Material: Stainless Steel front and sides, aluminized steel back;
Interior Oven Chamber: Porcelain Enameled;
Product Dimensions(WxDxH): 965*1130*1750 mm;
Oven Chamber Dimensions(WxDxH): 740*570*500 mm x2;
Grid Size(WxD): 710*530 mm (5PCs x2);
Gas Type: NG/LPG;
Burner: 3PCs cast iron burners x2;
Heat Output: 2 x 54,000 BTU/h ;
Ignition mode: pulse ignition;
With forced “cool down” mode;
Electronic thermostat(FAST) & manual timer control;
Temperature Range: +66°C ~ +260°C(150°F~500°F);
Motor Voltage: 120V/60Hz (or customized);
3/4” rear gas connection

Gas Convection Oven(digital control)

RGC-100D

Digital Control Single-Deck Double-Door Gas Convection Oven





Exterior Material: Stainless Steel front and sides, aluminized steel back;
Interior Oven Chamber: Porcelain Enameled;
Product Dimensions(WxDxH): 965*1130*1570 mm;
Oven Chamber Dimensions(WxDxH): 740*570*500 mm;
Grid Size(WxD): 710*530 mm (5PCs);
Gas Type: NG/LPG;
Burner: 3PCs cast iron burners;
Heat Output: 54,000 BTU/h;
Ignition mode: pulse ignition;
With forced “cool down” mode;
Digital thermostat and timer control;
Temperature Range: +66°C ~ +260°C (150°F~500°F);
Motor Voltage: 120V/60Hz (or customized);
3/4” rear gas connection

RGC-100D*2

Digital Control Double-Deck Double-Door Gas Convection Oven



Exterior Material: Stainless Steel front and sides, aluminized steel back;
Interior Oven Chamber: Porcelain Enameled;
Product Dimensions(WxDxH): 965*1130*1750 mm;
Oven Chamber Dimensions(WxDxH): 740*570*500 mm x2;
Grid Size(WxD): 710*530 mm (5PCs x2);
Gas Type: NG/LPG;
Burner: 3PCs cast iron burners x2;
Heat Output: 2 x 54,000 BTU/h;
Ignition mode: pulse ignition;
With forced “cool down” mode;
Digital thermostat and timer control;
Temperature Range: +66°C ~ +260°C(150°F~500°F);
Motor Voltage: 120V/60Hz (or customized);
Certification: ETL certified;
3/4” rear gas connection

Electric Food Warmer Cart

AKD-DBW-2-4

Double-Door 4-Layer Food Warmer Cart(Mechanical Control)



Mechanical Version - Stainless Steel Door;
Material: interior & exterior Stainless Steel;
Temperature Range:
+30°C ~ +85°C (86°F~185°F);
With a circulation fan for
even heat distribution;
Product Dimensions(WxDxH):
1070*660*880 mm;
Grid Size(WxD):
790*370 mm(spacing height 115mm);
Tray Capacity: 4PCs 1/1 GN pans;
Power: 1.31kW;
Voltage: 110~240V/50~60Hz

AKD-DBW-1-6

Single-Door 6-Layer Food Warmer Cart (Mechanical Control)



Mechanical Version - Stainless Steel Door;
Material: interior & exterior Stainless Steel;
Temperature Range:
+30°C ~ +85°C (86°F~185°F);
With a circulation fan for even heat distribution;
With a built-in hum`idity reservoir
and drainage system;
Product Dimensions(WxDxH):
728*937*1402 mm;
Inner Chamber Dimensions: 540*674*910 mm;
Grid Size(WxD):
530*650 mm(spacing height 120mm);
Tray Capacity: 12PCs 1/1 GN pans;
Power: 1.31kW;
Voltage: 110~240V/50~60Hz

AKD-DBW-1-6D

Single-Door 6-Layer Food Warmer Cart (Digital Control)



Digital Control Version - Tempered Glass Door;
Material: interior & exterior Stainless Steel;
With a circulation fan for even heat distribution;
With a built-in humidity reservoir
and drainage system;
Temperature Range:
+30°C ~ +85°C (86°F~185°F);
Product Dimensions(WxDxH):
728*937*1402 mm;
Inner Chamber Dimensions: 540*674*910 mm;
Grid Size(WxD):
530*650 mm(spacing height 120mm);
Tray Capacity: 12PCs 1/1 GN pans;
Power: 1.31kW;
Voltage: 110~240V/50~60Hz

Electric Food Warmer Cart

AKD-DBW-1-10SK

Double-door 10-Layer Food Warmer Cart(Mechanical Control)



Mechanical Version - Stainless Steel Door;
Material: interior & exterior Stainless Steel;
Temperature Range:
+30°C ~ +85°C (86°F~185°F);
With 2 circulation fans for even heat distribution;
With a built-in humidity reservoir and drainage system;
Product Dimensions(WxDxH):
728*937*1842 mm;
Upper Inner Chamber Dimensions:
540*674*640 mm;
Lower Inner Chamber Dimensions:
540*674*660 mm;
Grid Size(WxD):
530*650 mm(spacing height 105mm);
Tray Capacity: 20PCs 1/1 GN pans;
Power: 2.62kW;
Voltage: 110~240V/50~60Hz

AKD-DBW-1-10DSK

Double-door 10-Layer Food Warmer Cart(Digital Control)



Digital Control Version - Tempered Glass Door;
Meterial: interipr & exterior Stainless Steel;
Temperature Range:
+30°C ~ +85°C (86°F~185°F);
With 2 circulation fans for even heat distribution;
With a built-in humidity reservoir and drainage system;
Product Dimensions(WxDxH):
728*937*1842 mm;
Upper Inner Chamber Dimensions:
540*674*640 mm;
Lower Inner Chamber Dimensions:
540*674*660 mm;
Grid Size(WxD):
530*650 mm(spacing height 105mm);
Tray Capacity: 20PCs 1/1 GN pans;
Power: 2.62kW;
Voltage: 110~240V/50~60Hz

Electric Food Warmer Cart

AKD-DBW-1-11

Single-door 11-Layer Food Warmer Cart(Mechanical Control)



Mechanical Version - Stainless Steel Door;
Material: interior & exterior Stainless Steel;
Temperature Range:
+30°C ~ +85°C (86°F~185°F);
With 2 circulation fans for even heat distribution;
With a built-in humidity reservoir and drainage system;
Product Dimensions(WxDxH):
728*937*1842 mm;
Inner Chamber Dimensions:
540*674*1350 mm;
Grid Size(WxD):
530*650 mm(spacing height 105mm);
Tray Capacity: 22PCs 1/1 GN pans;
Power: 2.62kW;
Voltage: 110~240V/50~60Hz

AKD-DBW-1-11D

Single-door 11-Layer Food Warmer Cart(Digital Control)



Digital Control Version - Tempered Glass Door;
Material: interior & exterior Stainless Steel;
Temperature Range:
+30°C ~ +85°C (86°F~185°F);
With 2 circulation fans for even heat distribution;
With a built-in humidity reservoir and drainage system;
Product Dimensions(WxDxH):
728*937*1842 mm;
Inner Chamber Dimensions:
540*674*1350 mm;
Grid Size(WxD):
530*650 mm(spacing height 105mm);
Tray Capacity: 22PCs 1/1 GN pans;
Power: 2.62kW;
Voltage: 110~240V/50~60Hz

Electric Food Warmer Cart

AKD-DBW-11ST

Two-channel Single-door11-Layer Food Warmer Cart(Mechanical Control)



Digital Control Version - Tempered Glass Door;
Material: interior & exterior Stainless Steel;
Temperature Range:
+30°C ~ +85°C (86°F~185°F);
With a circulation fan for even heat distribution;
With a built-in humidity reservoir and drainage system;
Product Dimensions(WxDxH):
728*857*1842 mm;
Inner Chamber Dimensions:
540*700*1350 mm;
Grid Size(WxD):
530*650 mm(spacing height 105mm);
Tray Capacity: 22PCs 1/1 GN pans;
Power: 1.31kW;
Voltage: 110~240V/50~60Hz

AKD-DBW-11DST

Two-channel Single-door11-Layer Food Warmer Cart(Digital Control)



Digital Control Version - Tempered Glass Door;
Material: interior & exterior Stainless Steel;
Temperature Range:
+30°C ~ +85°C (86°F~185°F);
With a circulation fan for even heat distribution;
With a built-in humidity reservoir and drainage system;
Product Dimensions(WxDxH):
728*857*1842 mm;
Inner Chamber Dimensions:
540*700*1350 mm;
Grid Size(WxD):
530*650 mm(spacing height 105mm);
Tray Capacity: 22PCs 1/1 GN pans;
Power: 1.31kW;
Voltage: 110~240V/50~60Hz

Electric Food Warmer Cart

AKD-DBW-2-22

Double-door 22-Layer Food Warmer Cart(Mechanical Control)



Mechanical Version - Stainless Steel Door;
Material: interior & exterior Stainless Steel;
Temperature Range:
+30°C ~ +85°C (86°F~185°F);
With 2 circulation fans for even heat distribution;
With a built-in humidity reservoir and drainage system;
Product Dimensions(WxDxH):
1538*937*1842 mm;
Inner Chamber Dimensions:
537*674*1350 mm x2;
Grid Size(WxD):
530*650 mm(spacing height 105mm);
Tray Capacity: 44PCs 1/1 GN pans;
Power: 2.62kW;
Voltage: 110~240V/50~60Hz

AKD-DBW-2-22D

Double-door 22-Layer Food Warmer Cart(Digital Control)



Digital Control Version - Tempered Glass Door;
Material: interior & exterior Stainless Steel;
Temperature Range:
+30°C ~ +85°C (86°F~185°F);
With 2 circulation fans for even heat distribution;
With a built-in humidity reservoir and drainage system;
Product Dimensions(WxDxH):
1538*937*1842 mm;
Inner Chamber Dimensions:
537*674*1350 mm x2;
Grid Size(WxD):
530*650 mm(spacing height 105mm);
Tray Capacity: 44PCs 1/1 GN pans;
Power: 2.62kW;
Voltage: 110~240V/50~60Hz

PRODUCT APPLICATION SCOPE









GUANGDONG MEILERN CATERING EQUIPMENT CO., LTD.









MYLERN®

Your Trusted Commercial Kitchen Equipment Manufacturer

Address : No.6, Shangshuxia Road, Xinnan Village, Yuanjiangyuan,
Changping Town, Dongguan City, Guangdong Province, China
Website: www.meilern.com
https://meilern.en.alibaba.com
Email: manager@meilern.com
Mob.:+8613925531636